

HYPERLAST™ & DIPRANE™ SPRAYABLE ELASTOMERS

High Performance Sprayable Coatings



Formulated Systems

HYPERLAST™ & DIPRANE™ SPRAYABLE ELASTOMERS



INTRODUCTION


Dow Formulated Systems, a global business unit of The Dow Chemical Company, is an industry leader in the development and formulation of fully-formulated polyurethane and epoxy systems, focused on providing its customers worldwide with innovative, tailor-made solutions through a global network of systems houses.

Dow Formulated Systems provides application development and processing support to grow your business, with a range of innovative solutions for the most demanding industrial engineering applications. With more than 40 years experience in the development of polyurethane elastomers our products are used in engineering components to provide wear and tear protection in automotive, mining, mineral extraction, material handling, offshore and industrial engineering applications.

Acting as interpreter between chemist and engineer, we adapt and use the versatility of chemistry to provide practical solutions to industrial applications. By choosing Dow Formulated Systems, you'll have access to reliable service, creative polymer design, and the vast resources of one of the world's largest and most respected chemical companies.

High Performance Sprayable Coatings

The HYPERLAST™ and DIPRANE™ range of sprayable coatings offers the end client a range of rapid cure and fast drying coatings designed for various industrial and automotive protective applications. They have been developed to protect and extend the design life of a variety of substrates. These products are formulated without the use of solvents.

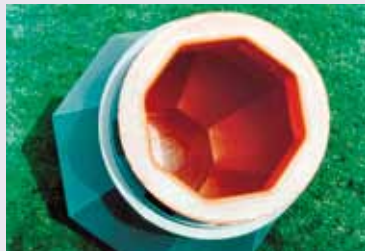

HYPERLAST sprayable systems are predominantly based on polyether chemistry. They yield elastomers with excellent dynamic performance and toughness through to polyether polyols which offer very good all round performance - especially in cold and wet environments.


DIPRANE sprayable systems are based on polyester or polycaprolactone chemistry to yield elastomers that are suitable in applications requiring a high degree of wear and tear resistance. Typical examples include ore and mineral extraction processes.



They can also be tailored to provide elastomers capable of excellent solvent resistance or anti-static properties.

The HYPERLAST™ and DIPRANE™ range of tough, durable coatings provide:

- Fast installation
- Non-slumping
- Fast return to service
- Non-solvent high build
- Corrosion protection
- Chemical resistance
- Reduced noise transmission

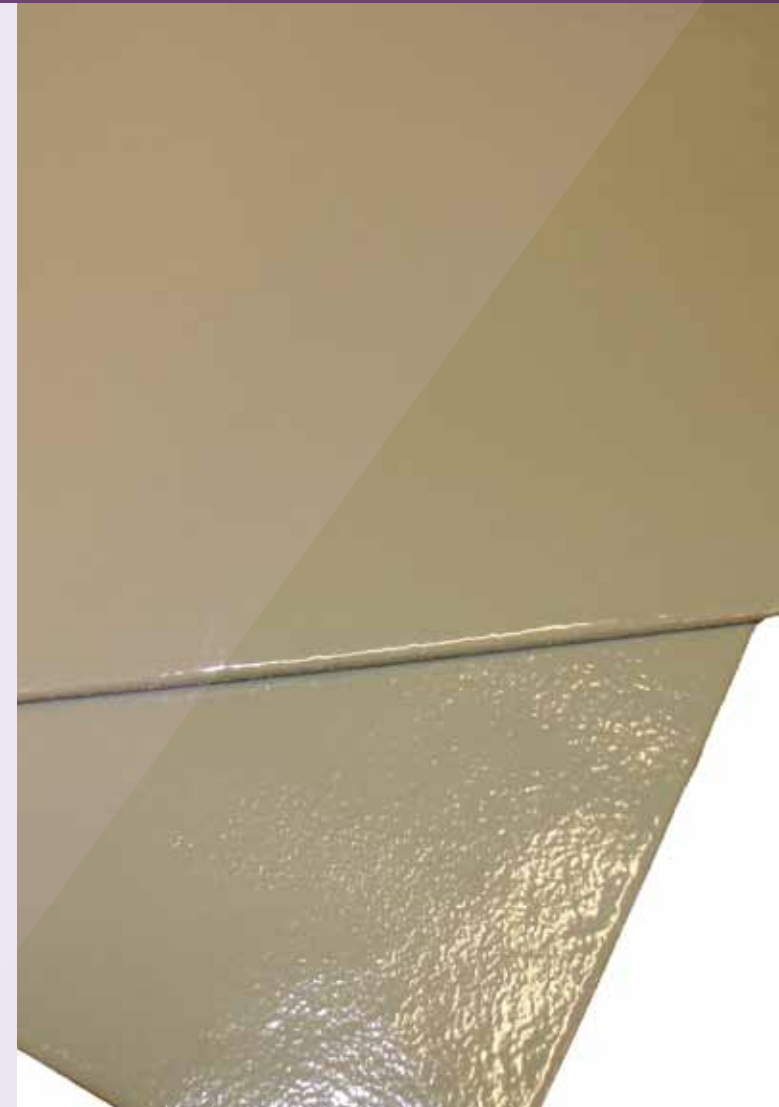

Properties Guide

BRAND	HYPERLAST						DIPRANE		
	EMP	TMP	TMP	EMH	TMH	EHU	SMP	SMP	SMP FR
Product Family									
Hardness Shore A (D)	70 - 90A	85	82	85, 95 & 80D	85	60D	83	85	90
Ambient processing	☺☺	☹	☹	☺☺	☹	☺☺	☹	☹	☹
Onsite process	☹	☹	☹	☺☺☺	☹	☺☺	☹	☹	☹
Ratio 1;1 by Vol	X	X	✓	✓	✓	✓	X	✓	X
High Pressure apply	☹	☺☺	☺☺	☺☺	☺☺	☺☺	☹	☺☺☺	☹
Low Pressure apply	☺☺	☺☺	☺	☺☺	☺☺	☺☺	☺☺	☹	☺☺
Hydrolysis Resistance	☺☺☺☺	☺☺☺☺	☺☺☺☺	☺☺☺☺	☺☺☺☺	☺☺☺☺	☺	☺	☺
Fire Retardant	☹	☹	☹	☹	☹	☹			☺☺☺
Low Temperature Flex	☺☺	☺☺	☺☺	☺☺	☺☺		☺	☺	☺
Abrasion Resistant	☺	☺☺☺☺	☺☺☺☺	☺	☺☺	☺	☺☺☺☺	☺☺☺☺	☺☺☺
Tear Resistant	☺	☺☺	☺☺	☺	☺☺	☺	☺☺	☺☺	☺☺☺
UV Stable						☺☺☺			

✓ Yes
 X No
 ☹ Unsuitable

☺ Good
 ☺☺ Very Good
 ☺☺☺ Excellent

High Performance Sprayable Coatings

From flexible elastomers to high hardness chemically resistant coatings, the HYPERLAST and DIPRANE range of sprayable coatings comprise of polymers that span from 70 shore A hardness to 80 shore D providing products to suit a variety of applications.

Utilising spray technology that is free from solvents, these systems allow the formation of seamless coatings, which can be applied evenly to both horizontal and vertical surfaces, capable of covering details and protrusions.

The extensive experience of The Dow Chemical Company has led to the optimization of the HYPERLAST and DIPRANE range of sprayable coatings in terms of process and performance. An impressive track record has been achieved with these products in the following areas:

- Pipe coating
- Fenders / buoys
- Truck bed linings
- Wear protection of metal components
- Theming



DOW FORMULATED SYSTEMS HOUSES



Global reach, local support

High Performance Sprayable Coatings

Reliable support and experience to meet your needs

At Dow Formulated Systems it's all about you – the customer. We aim to be your material technology provider of choice, offering application development and processing support to grow your business, streamline operations and increase efficiency. Through our vast portfolio of polyurethane and epoxy technology, we create innovative solutions for the most demanding industrial engineering applications. We offer over 40 years of experience, reliable service, and creative polymer design, as well as the vast resources of one of the world's most respected chemical companies.

Providing you with global reach, local support

As one of our customers, you can benefit from our global expertise and local technical support provided through a network of systems houses around the world. Our customers don't work with us just for the high-performance products we provide – they work with us because of the unmatched service and support we deliver to them at a local level, from the early stages of conducting trials and sampling through full-scale production and commercialization, we work hand in hand with our customers in their locations to ensure optimum performance. Having localized systems houses allows us to leverage our global knowledge quickly and smoothly – providing you with fast response times and technical support in your own language.

Supply and quality you can count on

At Dow Formulated Systems, we provide a reliable supply of products and deliver on time and in full to meet your deadlines and keep your projects on track. Our global supply and logistics capabilities are used to meet your needs, regardless of location.

About Dow Formulated Systems

Dow Formulated Systems, a global business unit of The Dow Chemical Company (Dow) is a global industry leader in the development and formulation of fully-formulated polyurethane and epoxy systems, focused on providing its customers worldwide with innovative tailor-made solutions through its Energy Efficiency, Alternative Energy & Composites, Industrial Castings and Adhesives, Infrastructure Life Preservation and Leisure & Lifestyle businesses.

Dow Formulated Systems manufactures and markets custom formulated rigid and semi-rigid, flexible, integral skin, and microcellular polyurethane foams and fully-formulated systems as well as coatings, adhesives, sealants, elastomers and binders used in applications ranging from residential and commercial construction, infrastructure repair, wind energy solutions, oil and gas, automotive, appliance, furniture, and shoe soles to decorative molding and athletic equipment. Striving to meet the specific needs of its customers in their local geographic regions, Dow Formulated Systems operates a global network of Systems Houses.



Formulated Systems

E: help@dowhyperlast.com

www.dowhyperlast.com

United States or Canada: Toll Free Call
+ 1 800 441 4369 or 989 832 1426
Mexico: Toll Free +1 800 441 4369

Europe: Phone: +31 11567 2626
Toll free phone: +800 3 694 6367*
Toll free Italy, call: +800 783 825
Toll free South Africa,
call: 0800 99 5078

**International toll free from Austria, Belgium, Denmark, Finland (prefix 990), France, Germany, Hungary, Ireland, The Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.*

Latin America: call
+55 11 5188 9000

Asia-Pacific: toll free call
+800 7776 7776** or +60 3 7965 5392

*** International toll free from Pacific countries - Korea, Japan, China, Taiwan, Hong Kong, Thailand, Malaysia, Singapore, Philippines, Australia, New Zealand. Toll free service may not function from certain cell phones, hotel phones, and some office PBX equipment*

®TM Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

This brochure is CarbonNeutral®

Designed and produced sustainably and using vegetable based inks. The paper contains 100% recycled fibre, produced at a mill that holds the ISO14001 certificate resulting in an embedded carbon footprint of around 70% less than the typical UK paper stock, which has been offset appropriately. Please recycle or return after use.

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, the Customer is responsible for determining whether products and the information in this document are appropriate for the Customer's use and for ensuring that the Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The technology represented in this document may not yet be registered, and related products may not yet be available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

References to "Dow" or the "Company" mean The Dow Chemical Company and its consolidated subsidiaries unless otherwise expressly noted.

Form No. 628-00421-1010-WLK